

## Bigà Pick up P1R and P2R rear load, no tow

Bigà Pick up P2R



Bigà Pick up P1R





Versatile electric means, to make the handling of various types of carts simple and practical without need to intervene on the safety of the operator who must push excessive weight for long rides or worse on slight climbs. The capacity can reach 300 kg for PK L1R and 600 kg for PK L2R.

The unique feature of these means is that the cargo floor is only 10 cm high by allowing the person who loads the basket, pushing him, to remain in the effort required by all the regulations regarding safety. Rising platform openable and closable without straining your back, stop security (if seat belt is not fastened), man aboard button and "close not no go" button (if the loading ramp is not completely closed). The drive wheel and the small size allow this Bigà to turn in very limited spaces, with angles of bends close to 110°. These extra touches make this Bigà a reference point for the regulation in force.



## TECHNICAL DATA SHEET BIGA' PICK-UP P1R-P2R

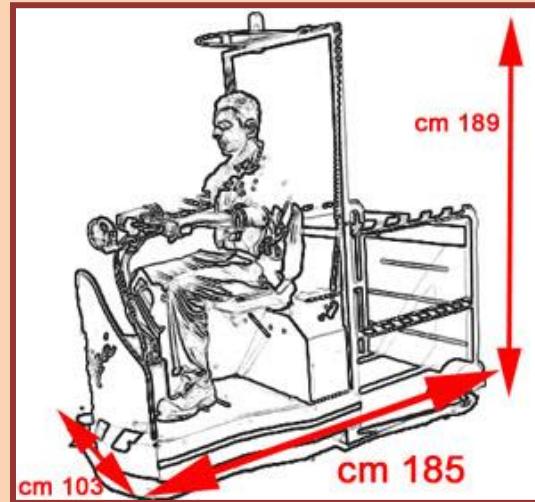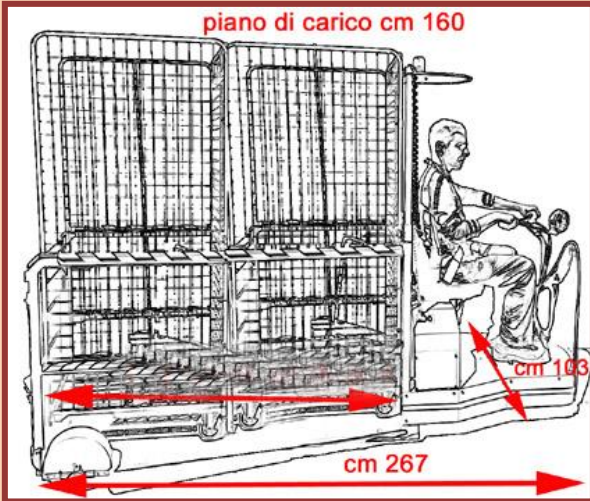

### Dimensions:

Pickup P1R 84 cm long load plan 77 cm wide

Lawn Tractor Total Length 1850 mm Width mm . 103 Height mm. 189

Pick-up P2R 168 cm long load plan 77 cm wide

Lawn Tractor Total Length 2670 mm Width mm 103 Height mm. 189

### Weights:

Pick-up P1R

Total including 2 batteries kg. 326

Pick-up P2R

Total including 2 batteries kg. 370

Batteries kg. 43.5 each x 2

### Driving wheel:

1200W 2400 RPM 24V motor wheel Separate excitation with electric brake.

### Voltage and batteries:

N. 2 batteries 12 v 140 A hermetic gel – series connection, maintenance free.

External charger 24 v – electronic - Power supply 220 v.

### Braking:

Electric brake e/m 10 Nm 24 v (engine braking) boosted in the calibration of parameters of the control unit. Electric brake active when the vehicle is stopped.

Speed and Capacity or Tow except the driver (performance with the vehicle in good working condition

on flat route:

No load speed 6 km/h

Maximum tow 2000 Kg

Maximum towing is considered with sliding cart on flat surface.

### Tires:

Covers: 3.00-4 super-elastic rubber plus

### Structure:

Tubular and Fe 37 sheet coated with polyester powder Ral 9010 for outdoor

### Warning devices and lighting:

Main headlight and taillights – backwards buzzer, horn.

### Reclosable safety devices:

Two foot contacts men on board. One belt contact. One contact with platform closed.

### Spare parts and tools for maintenance and repair:

Spare parts and tools for maintenance and repair are provided on order by Bigà Italia.

Noise Values: max values LpAm = 77.6 – LWA 85.6 – operator position Leq db(A) 77.6

Vibration values: avmax (i) = 0.47 m/s<sup>2</sup> (maximum value for operator seated in the driver's seat).

Bigà Italia

via G. Galilei trav. I° n° 12

25010 San Zeno Naviglio (BS)

Italia

Tel. +39 030.2161048

fax +39 030.2168077

[www.bigaitalia.it](http://www.bigaitalia.it) email [info@bigaitalia.it](mailto:info@bigaitalia.it)

